



PERSONAL RADIATION MONITOR/DOSIMETER

PM1605 PM1605A PM1605BT PM1605A-BT



Networkable technology for First Responders, HAZMAT teams and Firefighters

This instrument is designed for use in extreme conditions of high temperature, low visibility, loud noise and multiple shocks.

The design of the instrument has two large buttons that enable a user to operate the device with protective gloves.

The unit is "network ready" for automatic data transmission via smart phones application.

PM1605 is equipped with GM tube based detector to measure dose and dose rate gamma radiation in wide energy range.

In addition PM1605A is equipped with highly sensitive CsI(Tl) scintillation detector with short response time for fast detection and localization of radioactive and nuclear materials.



Both modifications may be equipped with BLE112 Bluetooth® low energy module (**PM1605BT, PM1605A-BT**).

Features

- Special app for iOS (iPod, iPhone, iPad) and for Android mobile devices (free download is available from the App Store or Google Play for using with PM1605BT, PM1605A-BT)
- Rugged aluminium enclosure is resistant to extreme temperature up to 212 °F for 2 minutes, water immersion, including salt-water up to 3.3 ft for at least 2 hours
- Environmental protection IP68
- Operating temperature -22 up to +149 °F
- Energy range from 48keV
- Large, easy-to-read LCD display
- Option to select readings in R or Sv
- Uses standard AA alkaline battery or rechargeable battery, can be powered by USB
- Battery lifetime 6 months

Alarms

- Bright visual alarm
- Audible alarm 85 dBA at 30 cm
- Vibration alarm

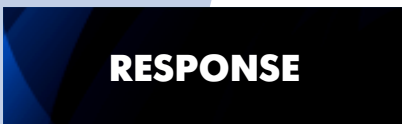



PERSONAL RADIATION MONITOR/DOSIMETER

PM1605 PM1605A PM1605BT PM1605A-BT

SPECIFICATIONS

Detector: - PM1605, PM1605BT - PM1605A, PM1605A-BT	Geiger-Mueller tube Geiger-Mueller tube, CsI(Tl)
Dose rate measurement range	10µR/h - 999R/h (0.1µSv/h - 10Sv/h)
Dose rate accuracy	± 15%
Dose measurement	100µR - 999 R (1 µSv - 100 Sv)
Dose accuracy	± 15%
Energy range	0.048 - 3 MeV
Energy response relative to 0.662 MeV (¹³⁷Cs)	± 30%
Response time for PM1605A, PM1605A-BT (display indication of new dose rate with a relative error of ±50 %) following an increase in radiation field by 1 µSv/h produced by a ¹³⁷ Cs source, not more than	5 sec
Instrument remains operable after short-time exposure (10 minutes) to gamma radiation with dose rate up to	10 000 R/h (100 Sv/h)
Alarm types	Audio, Visual, Vibration
Memory	2000 history events
PC Communication	USB
Wireless Communication (PM1605BT*, PM1605A-BT*)	Bluetooth® 4.0 (BLE112 Bluetooth® low energy module)
Power Battery Battery discharge control External power supply	One AA battery/rechargeable battery Pictogram on LCD USB
Operating temperature	-22 up to +149 °F (-30 up to +65 °C)
Relative air humidity (+40 °C and lower)	up to 98 %
Protection degree	IP68 , instrument case protects against water during submersion for 2 hours at a depth of 3.3 ft (1 m)
Drop test	4.9 ft (1.5 m)
Dimensions	4.48x2.44x0.78 in (114x62x20 mm)
Weight (including battery)	0.55 lb (250 g)

*Contains FCC ID: QOQBLE112
Contains IC: 5123A-BGTBLE112

ANSI N42.33 (most relevant parts)

Design and specifications of the device can be changed without notice.



North and South America

Polimaster Inc.
44873 Falcon Place, Suite 128
Sterling, VA 20166, USA
Phone: +1 703 525 5075
Fax: +1 703 525 5079
info@polimaster.us

www.polimaster.us

Europe

Polimaster Europe UAB
Ezero Str. 4, LT-13264 Didziasalis,
Vilnius region, Republic of Lithuania
Phone: +370 5 210 2323
Fax: +370 5 210 2322
polimaster@polimaster.lt

www.polimaster.eu

Asia, Africa, Australia and Oceania

Polimaster Ltd.
51, Skoriny St.,
Minsk, 220141, Republic of Belarus
Phone: +375 17 396 3675
+375 17 268 6819
Fax: +375 17 264 2356
polimaster@polimaster.com
www.polimaster.com

Japan

Polimaster Pacific
AUBE2 5-177 Kuratsuki
Kanazawa, Ishikawa Prefecture
920-8203 Japan
Phone: + 81 076 201 8623
Fax: + 81 076 201 8624
pacific@polimaster.jp
www.polimaster.jp